


MOLYGULF SPECIALIZED LUBRICANTS

Ultimate High Performance Specialty Lubricants



MG-240 HDMO ENGINE OIL SAE-15W40 /40/50 (CH-4 – CI-4)

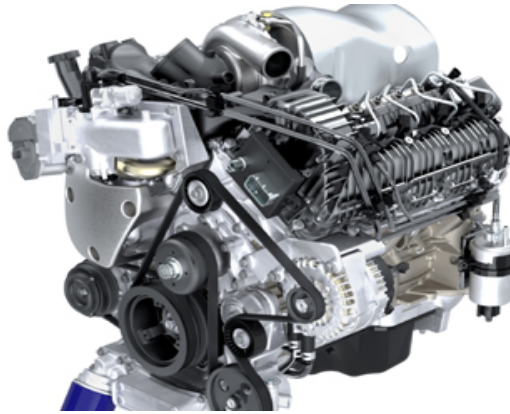

MG-240 Is premium quality heavy duty engine oil that is formulated to extend engine life, while providing for extended drain capability and improved fuel economy benefits.

APPLICATION:

MG-240 Is truly multi-purpose for all seasons with highly refined Paraffinic base oil provide excellent performance to maximize engine service life. It meets the following requirement of most engine manufacture.

FEATURES:

1. Longer Interval Between Oil Change
 2. Longer Service Between Engine Overhaul
 3. Excellent Corrosion Protection
 4. Dramatic Fuel Saving
 5. Keeps Engines Clean
 6. API Engine Service Classified
 7. Minimized Piston Rings and Cylinder Liner Wear
-
1. Excellent Wear and Deposit Protection of Off-Highway Diesel Engines that Burn High Sulfur Diesel Fuel.
 2. Exceptional Thermal Stability, for Outstanding Performance at High Engine Operating Temperatures.
 3. Viscosity index improver which will not make the oil thinning during high temperature and thicken during low temperature.
 4. Excellent Anti-Foaming Properties to Protect Against Aeration and Foaming.
 5. Increased Engine cleanliness.

MOLYGULF SPECIALIZED LUBRICANTS

Ultimate High Performance Specialty Lubricants



TYPICAL SPECIFICATIONS:

Test	Method	Frequency	Result
Appearance	Visual	F1	Bright & Clear
Color	D 1500		Neutral
Kin. Viscosity @ 100 C	D 445	F1	16
Kin. Viscosity @ 40 C	D 445	F2	131
Viscosity Index	D 2270	F2	125
Pour Point	D 97		-21
Flash Point	D 92	F2	235
TBN, mg KOH / g	D 2896	F2	6.50
Ca mass %	AAS		<1
Zn mass %	AAS		<1
Sulphated Ash % mm	D 874	F2	<1
Rust Prevention Charac	D 665		
Foam Seq I, II, III	D 892		Pass